


THE Honey

MODULE

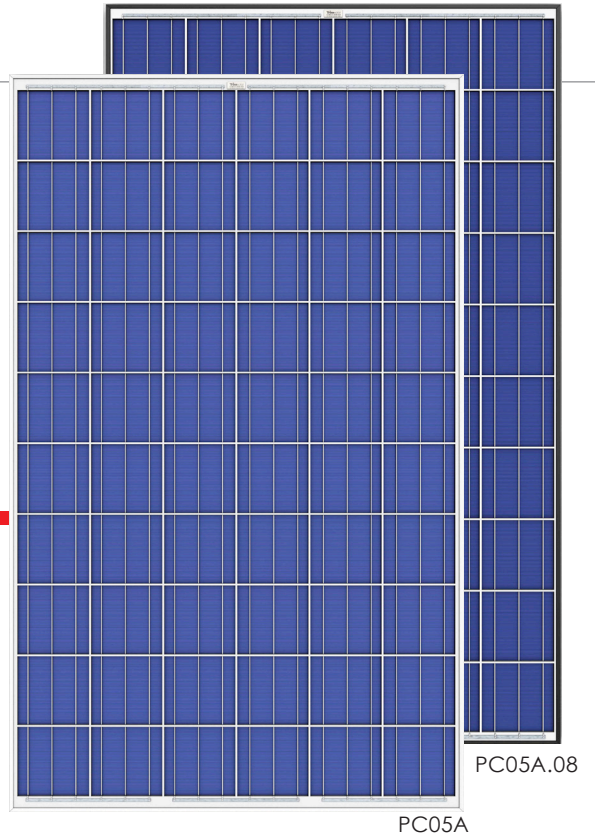

60 CELL
MULTICRYSTALLINE MODULE

245-260W
POWER OUTPUT RANGE

15.9%
MAXIMUM EFFICIENCY

0~+3%
POWER OUTPUT GUARANTEE

As a leading global manufacturer of next generation photovoltaic products, we believe close cooperation with our partners is critical to success. With local presence around the globe, Trina is able to provide exceptional service to each customer in each market and supplement our innovative, reliable products with the backing of Trina as a strong, bankable partner. We are committed to building strategic, mutually beneficial collaboration with installers, developers, distributors and other partners as the backbone of our shared success in driving Smart Energy Together.

Trina Solar Limited
www.trinasolar.com



Excellent low light performance on cloudy days, mornings and evenings

- Advanced surface texturing
- Back surface field
- Selective emitter



Maximize Limited Space

- 60-cell module power output up to 260W
- Up to 159 W/m² power density



Highly reliable due to stringent quality control

- Over 30 in-house tests (UV, TC, HF, and many more)
- In-house testing goes well beyond certification requirements
- PID resistant




Certified to withstand challenging environmental conditions

- 2400 Pa wind load
- 5400 Pa snow load
- 35mm hail stone at 97 km/h

LINEAR PERFORMANCE WARRANTY

10 Year Product Warranty • 25 Year Linear Power Warranty

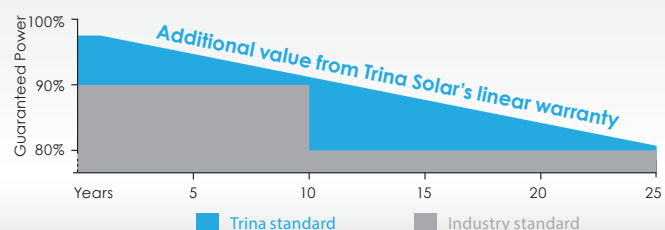

THE Honey MODULE


PRODUCTS

TSM-PC05A
TSM-PC05A.08


POWER RANGE

245-260W
245-260W


DIMENSIONS OF PV MODULE unit:mm

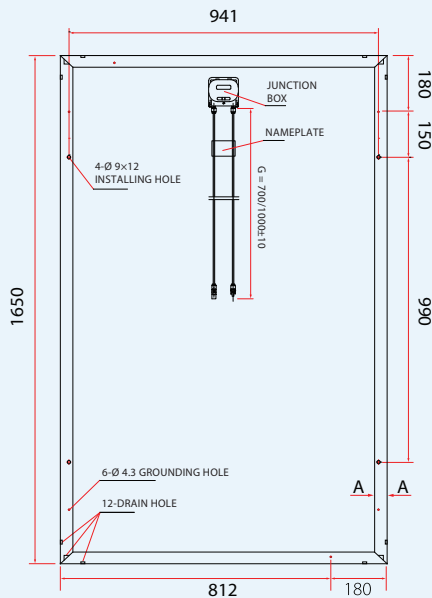

Back View



I-V CURVES OF PV MODULE(255W)

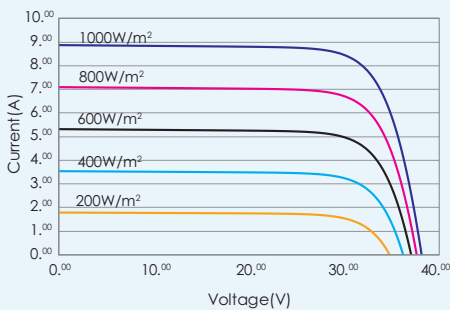

CERTIFICATION



ELECTRICAL DATA (STC)

Peak Power Watts- P_{MAX} (Wp)	245	250	255	260
Power Output Tolerance- P_{MAX} (%)	0 ~ +3			
Maximum Power Voltage- V_{MPP} (V)	29.9	30.3	30.5	30.6
Maximum Power Current- I_{MPP} (A)	8.20	8.27	8.37	8.50
Open Circuit Voltage- V_{OC} (V)	37.8	38.0	38.1	38.2
Short Circuit Current- I_{SC} (A)	8.75	8.79	8.88	9.00
Module Efficiency η_m (%)	15.0	15.3	15.6	15.9

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.
Typical efficiency reduction of 4.5% at 200 W/m² according to EN 60904-1.

ELECTRICAL DATA (NOCT)

Maximum Power- P_{MAX} (Wp)	182	186	190	193
Maximum Power Voltage- V_{MPP} (V)	27.6	28.0	28.1	28.3
Maximum Power Current- I_{MPP} (A)	6.59	6.65	6.74	6.84
Open Circuit Voltage- V_{OC} (V)	35.1	35.2	35.3	35.4
Short Circuit Current- I_{SC} (A)	7.07	7.10	7.17	7.27

NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar cells	Multicrystalline 156 × 156 mm (6 inches)
Cell orientation	60 cells (6 × 10)
Module dimensions	1650 × 992 × 35 mm
Weight	18.6kg
Glass	3.2 mm, High Transmission, AR Coated Tempered Glass
Backsheet	White
Frame	Silver Anodized Aluminium Alloy (PC05A); Black(PC05A.08)
J-Box	IP 65 or IP 67 rated
Cables	Photovoltaic Technology cable 4.0 mm ² , 700/1000 mm
Connector	MC4 or MC4 Compatible

TEMPERATURE RATINGS

Nominal Operating Cell Temperature (NOCT)	44°C(± 2°C)
Temperature Coefficient of P_{MAX}	- 0.41%/°C
Temperature Coefficient of V_{OC}	- 0.32%/°C
Temperature Coefficient of I_{SC}	0.05%/°C

MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1000V DC (IEC)
Max Series Fuse Rating	15A

WARRANTY


10 year Product Workmanship Warranty
25 year Linear Power Warranty

(Please refer to product warranty for details)

PACKAGING CONFIGURATION

Modules per box: 30 pieces(Standard Box)
38 pieces(Small Box)

Modules per 40' container: 840 pieces(Standard Box)
532 pieces(Small Box)



TSM_EN_July_2014_A